



MEETING: ORDINARY MEETING OF COUNCIL
DATE: 20 December 2023

DEPARTMENT: INFRASTRUCTURE
OFFICER: Kathryn Johnson, Director Infrastructure


| | |
|----------------------|---|
| REPORT ITEM: | 16.4.1 |
| REPORT TITLE: | EXTENSION OF SHARED PATH ON THREE CHAIN ROAD |

| | |
|-----------------------|---|
| Timeframe | 2023/24 |
| Budget Impact | State Bicycle Fund - \$200,000 LRCI Phase 4B - \$320,558 (to be confirmed) |
| File Reference | 7.41.7.1 |

DISCUSSION

Confirmation has been received that the extension to the shared walking and cycling path along Three Chain Road will be considered for eligibility for the LRCI Phase 4B providing the shared path is a shoulder widening project, which for the most part it is.

The shared path shall have a sealed shoulder constructed alongside the roadway and the general alignment of the path will typically travel 1.5 m off of the existing roadway.

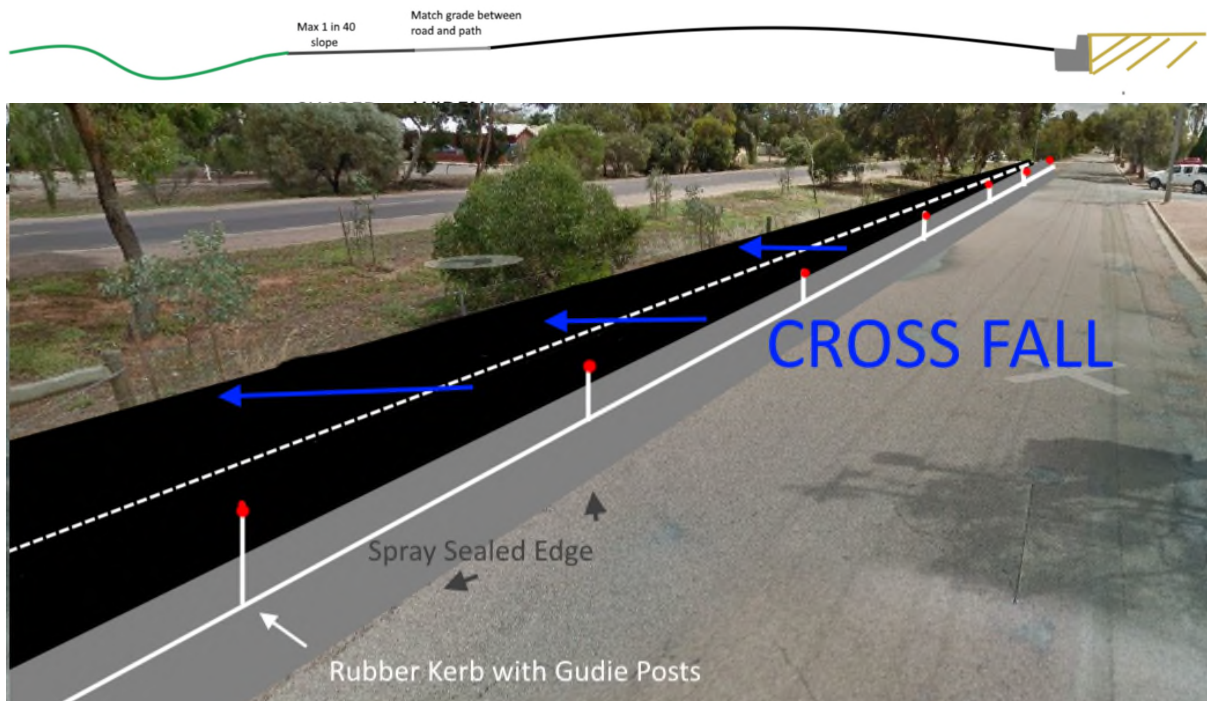

A semi mountable white rubber kerb, 230 mm wide by 125 mm high will be installed along the spray seal shoulder. The purpose of this is to prevent cars from parking on the shared pathway.



The construction of the extension to the shared path is currently out to tender and closes on 16 January 2024. The scope of works included in the tender is as follows:

- Construct a new 3m wide shared pathway
- Construction of Kerb Ramps
- Widen road shoulder
- Supply and installation of signage, bollards and refugee rails
- Removal of timber bollards and guard railing

Consultation will be carried out in January and February 2024 while the tender process is finalised.

The works are programmed to be completed by 30 June 2024, subject to the availability of a suitable contractor.

Attachment 1: Shared Pathway Alignment



- Shared Pathway
- Bollards & Rails Etc
- ★** Kerb Ramps
- Rubber Kerb & Shoulder Widening







